

Night Sentry




u s e r ' s g u i d e

Important Export Restrictions! Commodities, products, technologies and services contained in this manual are subject to one or more of the export control laws and regulations of the U.S. Government and they fall under the control jurisdiction of either the US Department of State or the US BIS-Department of Commerce. It is unlawful and strictly prohibited to export, or attempt to export or otherwise transfer or sell any hardware or technical data or furnish any service to any foreign person, whether abroad or in the United States, for which a license or written approval of the U.S. Government is required, without first obtaining the required license or written approval from the Department of the U.S. Government having jurisdiction. Diversion contrary to U.S. law is prohibited.



**AMERICAN
TECHNOLOGIES
NETWORK
CORP.**

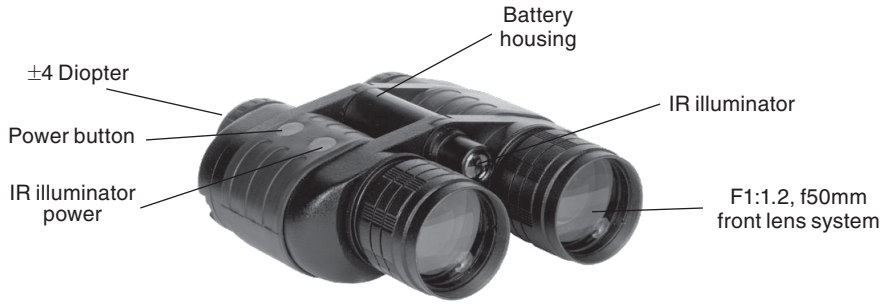

FEATURES

- 4x compact binocular
- Built in infrared illuminator
- High res. Gen 1+ Image intensifier tubes
- Easy to use digital controls
- Water and fog resistant
- Limited Lifetime Warranty

SPECIFICATIONS

Total Darkness Technology	Standard
Magnification	4X
Intensifier Tube	High Res. 1st Gen +
Detection Range	150 m/yards
Recognition Range	100 m/yards
Lens System	F1:1.2, 50 mm
FOV	10°
Diopter Adjustment	±4
Resolution	40 lp/mm
Power Supply	One 3 V Battery, (CR-123A)
Range Of Focus	3m to Infinity
Battery Life	10-20 Hours
Operating Temperature	-15°C to +40°C
Dimensions	176mm X 162 mm X 57mm
.....	6.9" X 6.4" X 2.2"
Weight	0.85 Kg/2 Lbs

APPLICATION

The Night Sentry is a compact, stylish night vision binocular. 4x magnification all glass lens systems combined with high quality 1st generation + light intensifier tubes gives you a bright and sharp image in any dark situation you may find yourself in. A built-in long-range infrared illuminator is also included to let you see even in total darkness. Do not let darkness impair your vision for a moment longer. Whether you are camping, boating, observing wildlife or surveying your property for intruders the Night Sentry night vision binocular let you see what goes bump in the night.

The Night Sentry Night Vision Binocular is a complex optoelectronic system for individual use. The device consists of an objective lens assembly, eyepiece and a body. The body contains 1st Gen.+ image intensifier tubes assembly with an integrated high voltage power source and the three volt battery housing. When installing the battery one should keep in mind that the battery polarity should coincide with the diagram on the body next to the battery housing cap.

Objective lens protective cover is intended to protect objective lens from dust and scratches. It also will act as a daylight filter, allowing you to test the scope in daylight or other bright light situations. The pinhole in the center of the protective cover allows a user to check an operation ability of the device in daylight conditions.

NOTE: Do not test the scope in daylight conditions even with the daylight filter/lens cap on for more than ten (10) minutes.

The information in this manual furnished for information use only, is subject to change without notice, is not to be construed as a commitment by ATN Corp.

ATN Corp. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book.

©2006 ATN Corp. All right reserved.

OPERATION

- Take the binocular out of the case.
- Install the battery into the housing with the polarity order as shown inside of the battery cap. Battery Type: 3V, CR-123A .
- Turn on the device by shortly pressing the POWER switch button for about 8-12 seconds with the protective lens cover still attached to the lens. Do not turn the unit on in the daytime without the protective lens cap on. Pressing the POWER switch button for some 8-12 seconds will activate the night vision device enabling you to make observation in the dark. The greenish-lit screens of the image tubes (when looking through the eyepieces) will mean that the image tubes are boosted. After each press of the switch button the brightness of the screens will decrease slowly enabling you to conduct observations and surveillance during some minutes. It is normal and economizes the energy of the battery. As soon as the brightness of the image becomes insufficient, boost the image tube once more by shortly pressing the switch button.
- Observe the scene and adjust the diopter for optimal image clarity. Focus the front lens until the image and the grain are both sharp.
- You may now enter a dark environment or simply shut the lights off in order to darken the room.
- Next, remove the lens cap/daylight filter. Adjust the front lens for distance of the focus. You should not have to readjust the diopter.

NOTE: We suggest that you focus the diopter during daylight with the filter on.

NOTE: The front lens should be readjusted as you view objects at different distances.

INFRA-RED ILLUMINATOR

Infra-red (IR) illuminators, are common to night vision. The IR light greatly enhances the performance of the Night Sentry while remaining almost totally invisible to the naked eye. The IR illuminator on the Night Sentry is located next to the front lens.

In extremely dark environments (no stars light or moon light in a basement or cellar) turn on the IR illuminator by pressing its switch button will activate the illuminator for approximately 40 sec. Press the IR LED button once more to activate the illuminator for another 40 sec.

WARNINGS AND CAUTIONS

- Always remember to turn off the Night Sentry when it is not in use. If you do not plan on using your unit for a period of more than 10 days, you should remove the batteries.
- **Keep lens cap/daylight filter on when not in use.**
- Avoid contact with dust, steam, and gas.
- The Night Sentry is not harmful to the user or the environment.
- Do not disassemble except to clean the front lens and the eyepiece: **it will void your warranty.**
- Evaluate the scopes function by looking through it in a lit environment with the daylight filter lens cap on. Never use in daylight without the daylight filter lens cap on. Do not surpass ten minutes of testing.
- **Never point the Night Sentry at a bright light source.** If the scope shuts off automatically after directing it at a bright light source, turn the unit off and wait 1 - 2 minutes before turning the unit back on.
- Adverse atmospheric conditions such as fog, smog, or haze and a lack of ambient light (moon or starlight) may diminish the effective viewing distance. All technical data for this unit was compiled in a controlled environment.
- If you use the rubber eyecaps for a long period of time, you may suffer skin inflammation. If you develop any symptoms, consult a doctor immediately.

TROUBLE SHOOTING

- Q:** Flashes, flickers or clicking occur while operating
- S:** If it occurs within the first five minutes of inserting new batteries, it is normal and the device will resume normal operation soon thereafter. If it occurs for more than 10 minutes, contact for service instructions.
- Q:** Dark spots on screen.
- S:** These are either cosmetic blemishes in the intensifier tube or dust particles.
- Q:** Screen becomes darker than at previous use.
- S:** Replace batteries. If problem persists, contact your dealer or other authorized service representative for service instructions.
- Q:** Image not clear.
- S:** Adjust objective lens, and/or the eyepiece.

ATN LIMITED LIFETIME WARRANTY

ATN Limited Lifetime Warranty is limited to the product being free of manufacturer defects in materials and workmanship. In regards to night vision products the image intensifier tube is warranted to be free from manufacturer defects for a period of 2 years (defects do not include minor black spots or blemishes in viewing area). ATN will repair or replace said products or part thereof which upon inspection by ATN are found to be defective in materials or workmanship. As a condition to the obligation of ATN to repair or replace said product, the product must be returned to ATN together with proof-of-purchase satisfactory to ATN. This warranty does not cover damages caused by misuse or improper handling. This warranty is null and void if modification or maintenance is provided by parties other than ATN Corp. In the event a defect that is covered by the foregoing warranty occurs during the applicable period stated above, ATN, at its option, will either repair or replace the product, and such action on the part of ATN shall be the full extent of ATN's liability, and the Customer's sole and exclusive remedy. This warranty does not cover a product (a) used in other than its normal and customary manner; (b) subjected to misuse; (c) subjected to alterations, modifications or repairs by the Customer or by any party other than ATN without prior written consent of ATN; (d) special order or "close-out" merchandise or merchandise sold "as-is" by either ATN or the ATN dealer; or (e) merchandise that has been discontinued by the manufacturer and either parts or replacement units are not available due to reasons beyond the control of ATN. ATN shall not be responsible for any defects or damage that in ATN's opinion is a result from the mishandling, abuse, misuse, improper storage or improper operation, including use in conjunction with equipment which is electrically or mechanically incompatible with or of inferior quality to the product, as well as failure to maintain the environmental conditions specified by the manufacturer.

CUSTOMER IS HEREBY NOTIFIED THAT OPERATION OF THE EQUIPMENT DURING DAYLIGHT HOURS OR UNDER ANY EXCESSIVE LIGHT CONDITIONS MAY PERMANENTLY DAMAGE THE INTERNAL COMPONENTS OF THE UNIT AND SAID DAMAGE WILL NOT BE COVERED UNDER THIS WARRANTY. This warranty is extended only to the original purchaser. Any breach of this warranty shall be waived unless the customer notifies ATN at the address noted below within the applicable warranty period.

The customer understands and agrees that except for the foregoing warranty, no other warranties written or oral, statutory, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose, shall apply to the product. All such implied warranties are hereby and expressly disclaimed.

LIMITATION OF LIABILITY

ATN will not be liable for any claims, actions, suits, proceedings, costs, expenses, damages or liabilities arising out of the use of this product. Operation and use of the product are the sole responsibility of the Customer. ATN's sole undertaking is limited to providing the products and services outlined herein in accordance with the terms and conditions of this Agreement. The provision of products sold and services performed by ATN to the Customer shall not be

interpreted, construed or regarded, either expressly or implied, as being for the benefit of or creating any obligation toward any third party of legal entity outside ATN and the Customer; ATN's obligations under this Agreement extend solely to the Customer. **ATN's liability hereunder for damages, regardless of the form or action, shall not exceed the fees or other charges paid to ATN by the customer or customer's dealer. ATN shall not, in any event, be liable for special, indirect, incidental or consequential damages, including, but not limited to, lost income, lost revenue or lost profit, whether such damages were foreseeable or not at the time of purchase, and whether or not such damages arise out of a breach of warranty, a breach of agreement, negligence, strict liability or any other theory of liability.**

PRODUCT WARRANTY REGISTRATION

In order to validate the warranty on your product, ATN must receive a completed Product Warranty Registration Card for each unit. Please complete the form below and immediately mail it to our Service Center: ATN Corporation, 1341 San Mateo Avenue, South San Francisco CA 94080. Products qualifying for warranty repair will be either repaired or replaced within 10 business days of receipt of merchandise unless the customer is notified otherwise.

OBTAINING WARRANTY SERVICE

To obtain warranty service on your unit, take or send the product, postage paid, with a copy of your sales receipt to our service center, ATN Corporation at the address noted above. All merchandise must be fully insured with the correct postage; ATN will not be responsible for improper postage or, missing or damaged merchandise during shipment.

For customer service and technical support, please contact
American Technologies Network Corp.

North American Office

1341 San Mateo Avenue
South San Francisco, CA 94080

Toll Free Phone: 800-910-2862
Phone: 650-875-0130; fax: 650-875-0129

European Office

phone: 44(0)870-0111286, fax: 44(0) 845-3349142

The following countries can use our
toll free number 00 800 9102-8620
Austria, France, Germany, Holland, Italy, Spain,
Sweden, Switzerland
www.atncorp.com